

Features

- Integral lumbar support.
- Oval basin creates a spacious bathing experience.
- Slotted overflow allows for deep soaking.
- Center drain.

Material

Acrylic.

Installation

- Requires K-7271 or K-7272 Clearflo slotted overflow bath drain (sold separately).
- Drop-in or undermount.

Required Products/Accessories

K-7271 Brass Slotted Overflow Bath Drain or

K-7272 PVC Slotted Overflow Bath Drain

Recommended Products/Accessories

K-883 Under-Mount Installation Kit K-24916 Wireless Music Kit K-23726 Drain treatment K-23732 Tub & shower cleaner



Codes/Standards

CSA B45.5/IAPMO Z124

KOHLER[®] Plastic Baths and **Receptors Lifetime Limited Warranty**

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|---------------|
| | 0 | White |
| | 96 | Biscuit |
| | 47 | Almond |
| | NY | Dune |
| | 95 | Ice™ Grey |
| | G9 | Sandbar |
| | 33 | Mexican Sand™ |
| | K4 | Cashmere |
| | 58 | Thunder™ Grey |
| | 7 | Black Black™ |




Underscore[®] Oval


65-1/2" x 35-5/8" drop-in bath K-5715




Underscore® Oval 65-1/2" x 35-5/8" drop-in bath K-5715

No change in measurements if connected with drain illustrated. (K-7272) Recommended Faucet Location

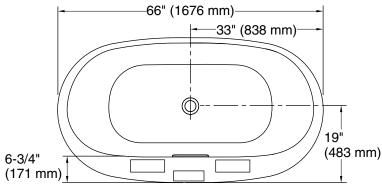



Recommended Faucet Hole Location

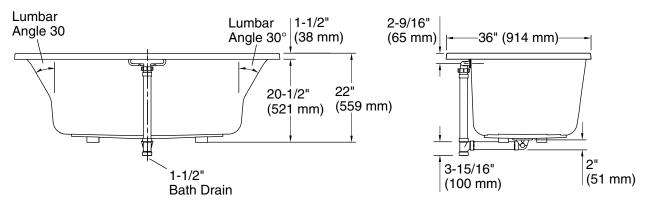

Technical Information

All product dimensions are nominal.

| • | |
|---------------------|--|
| Installation: | Drop-in, Under-mount |
| Drain location: | Center |
| Basin area, bottom: | 47" x 26-1/4" (1193 mm x 666 mm) |
| Basin area, top: | 61-3/16" x 28-3/8" (1554 mm x 721 mm) |
| Weight: | 90 lbs (40.8 kg) |
| Minimum floor load: | 51.7 lbs/ft² (252.4 kg/m²) |
| Water depth: | 17-9/16" (446 mm) |
| Water capacity: | 85.5 gal (323.7 L) |
| Template: | Drop-in, 1268439-7, required, included |
| | |

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.

