

72" X 42" X 21" - RECTANGLE (2 PERSON)

FEATURES

- 12 seamless InvisiJets including:
 - 2 back jets on each end
 - 4 body jets on each side
- 2 B.P.H. pump 9 Amps
- 39 seamless air injectors
- 600 watt air heater
- Suitable for drop-in or undermount applications
- High gloss/high impact acrylic
- Totally insulated with polyurethane foam
- Passive warm air induction system
- Gravity flow draining for sanitary bathing
- Anti-microbial flex piping
- Pre-leveled lip with slip-resistant bottom
- Linear drain
- LED light standard
- Electronic keypad control
- Sound absorption
- 10 year limited warranty

JettaWarm is a surface heating system secured beneath the acrylic in a blanket of insulation to provides gentle warmth on the back rest of your JETTAWARM tub before your bath begins.

Activates in minutes, bathers can relax from the moment they enter the tub. Soaker tubs have full backrest coverage, while a whirlpool or combo has a system designed to wrap around the hydrotherapy features and warm the acrylic where you need it.

OPTIONS AVAILABLE

- Spa pillows
- 6" acrylic grab bars
- JettaWARM Heated Backrest

COLORS AVAILABLE

Standard Color: White **Decorator Colors*:** Biscuit

RECOMMENDED OPERATING GALLONS

Minimum: 62 Maximum: 123

*Minimum operating gallon capacity required for system operation






Jetta guarantees that the water temperature in our insulated whirlpool baths will stay within 2 degrees of its original fill temperature for 30 minutes of use without an inline heater.

^{*}Requires additional lead time

JETTA COMBO HYDROTHERAPY | 72" X 42" X 21" | CENTER DRAIN

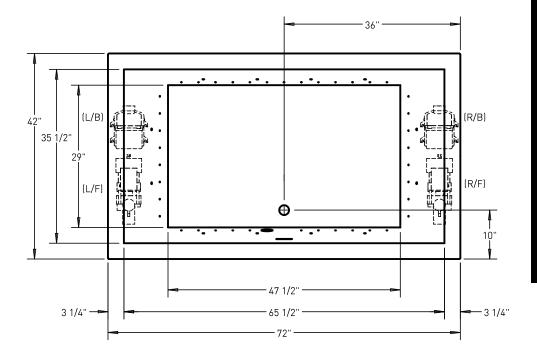

ELECTRICAL SPECIFICATIONS

Required Electrical Service 110/115 Volts Standard Whirlpool 20 amp GFI Standard Air 20 amp GFI Each pump and blower must be protected by a dedicated

GFI breaker (refer to local codes)

CODES/STANDARDS APPLICABLE

Specific model meets or exceeds the requirements for the following standards: ANSI, ASME.

SUGGESTED PUMP & BLOWER ACCESS

Suggested access size 20" x 12" Actual size may vary depending on distance of access to pump & blower location.

DROP-IN CUT OUT DIMENSIONS

Subtract 1" from length and width dimensions Actual cut out dimension 71" x 41"


SHIPPING WEIGHT 190 lbs



*L/F pump, L/B blower or R/F pump, R/B blower positions are standard om pump and blower locations available upon request

Natte: optional pump/b

lower positions avail

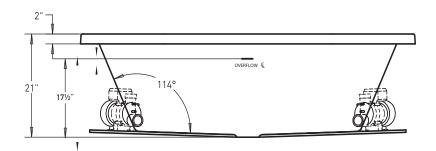

INSTALLATION: MEASURE TUB BEFORE BUILDING TUB DECK.

For best results, Jetta Corporation recommends 1"-3" of mortar bedding under the tub base for maximum support. Drawing shows manufacturer's standard pump and blower location(s). Contact Jetta for details. Dimensional variance on drawings may be +/- 1/2 inch and are subject to change without notice.

JETTACORP.COM



etta Corporation. All rights reserved. Specifications are subject to change without notice REV 09/2020