

Veil® One-piece elongated dual-flush toilet K-1381-HC

Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design.
- Elongated bowl offers added room and comfort.
- Dual flush offers a choice of 0.8 or 1.28 gpf (3.0 or 4.8 lpf).
- Left-hand Polished Chrome trip lever.
- 2-1/8" (54 mm) fully-glazed trapway.
- Skirted trapway simplifies cleaning.
- Hidden cord design conceals cleansing seat cords.
- Coordinates with other products in the Veil collection.
- Vitreous china.

Installation

• Standard 12" (305 mm) rough-in.

Recommended Products/Accessories

1023457 Wax Ring/Hardware Kit 1265114 Connector Hose K-27142-CR C3®-430 nightlight heated elongated cleansing toilet seat K-26132-CSP C3®-420 Heated elongated cleansing toilet seat





Codes/Standards ASME A112.19.2/CSA B45.1 ASME A112.19.14 DOE - Energy Policy Act 1992 EPA WaterSense[®] California Energy Commission (CEC)

KOHLER[®] Toilets and Seats Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description


0 White



Veil®



One-piece elongated dual-flush toilet K-1381-HC

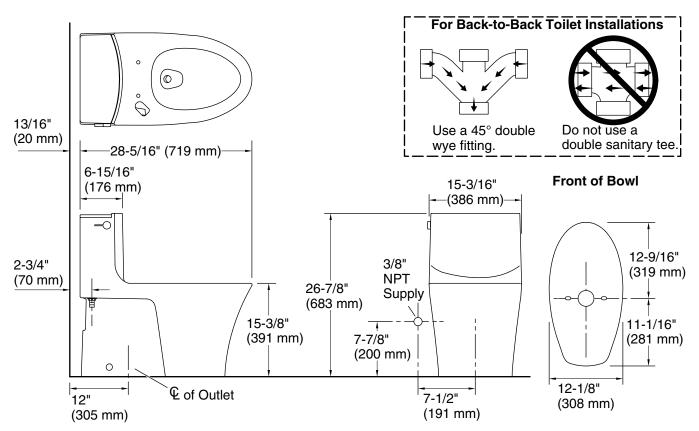

Technical Information

All product dimensions are nominal.		
Waste Outlet:	Floor	
Bowl shape:	Compact elongated	
Flush type:	Siphon jet	
Trap passageway:	2" (51 mm)	
Water Consumption		
Full:	1.28 gpf (4.8 lpf)	
Reduced:	0.8 gpf (3 lpf)	
Water surface size:	9" x 7-1/2" (229 mm x 191 mm)	
Rim to water surface:	5-3/8" (137 mm)	
Rough-in:	12" (305 mm)	
Template:	Footprint, 1262234-7, not required, included	

dura Supply Deguirements

Fixture Supply H	requirements
Min static pressure:	20 psi (137.9 kPa)

Max static pressure:	80 psi (551.6 kPa)
Min flowing pressure:	15 psi (103.4 kPa)
Min flow rate:	1 gpm (3.8 lpm)

Notes

Install this product according to the installation instructions.

