

# Low Flow Vandal Resistant Aerator

Sortie de brise-jet faible anti vandalisme

Rociador de flujo bajo con protección contra vandalismo

Product Specifications



## MLFVRA-CP

### FEATURES


- For use with 111, 111E, 111D, 111DE, 111-WS, 111E-WS, 121, 121E, 122, 122E, 122-WS, 122E-WS, 122R, 122RE, 122R-WS, 122RE-WS, 123R, 123RE, 123R-WS, 123RE-WS, 211, 211E, 211-PU, 211E-PU, 212, 212-PU, 222, 222E, 222-PU, 222E-PU, 222R-PU, 222RE-PU, 223-PU, 223E-PU, 223, 223E, 225, 225E, 621, 621E, 622, 622E, 625, 625E, 629, 629E, T621 and T621E
- Max Flow Rate: 0.5 GPM @ 60 PSI
- 100% Factory Pressure Tested
- Lead Free if used with compliant faucet

### CARACTÉRISTIQUES

- Utiliser avec 111, 111E, 111D, 111DE, 111-WS, 111E-WS, 121, 121E, 122, 122E, 122-WS, 122E-WS, 122R, 122RE, 122R-WS, 122RE-WS, 123R, 123RE, 123R-WS, 123RE-WS, 211, 211E, 211-PU, 211E-PU, 212, 212-PU, 222, 222E, 222-PU, 222E-PU, 222R-PU, 222RE-PU, 223-PU, 223E-PU, 223, 223E, 225, 225E, 621, 621E, 622, 622E, 625, 625E, 629, 629E, T621 et T621E
- Débit maximum: 0,5 gal/min à 60 lb/po<sup>2</sup>
- Pression vérifiée en usine- 100%
- Sans plomb si utilisé avec un robinet conforme

### CARACTERÍSTICAS

- Para usar con 111, 111E, 111D, 111DE, 111-WS, 111E-WS, 121, 121E, 122, 122E, 122-WS, 122E-WS, 122R, 122RE, 122R-WS, 122RE-WS, 123R, 123RE, 123R-WS, 123RE-WS, 211, 211E, 211-PU, 211E-PU, 212, 212-PU, 222, 222E, 222-PU, 222E-PU, 222R-PU, 222RE-PU, 223-PU, 223E-PU, 223, 223E, 225, 225E, 621, 621E, 622, 622E, 625, 625E, 629, 629E, T621 y T621E
- Flujo máximo: 0,5 GPM @ 60 PSI
- Probado en fábrica bajo presión al 100%
- Sin plomo si se utiliza con grifo compatible

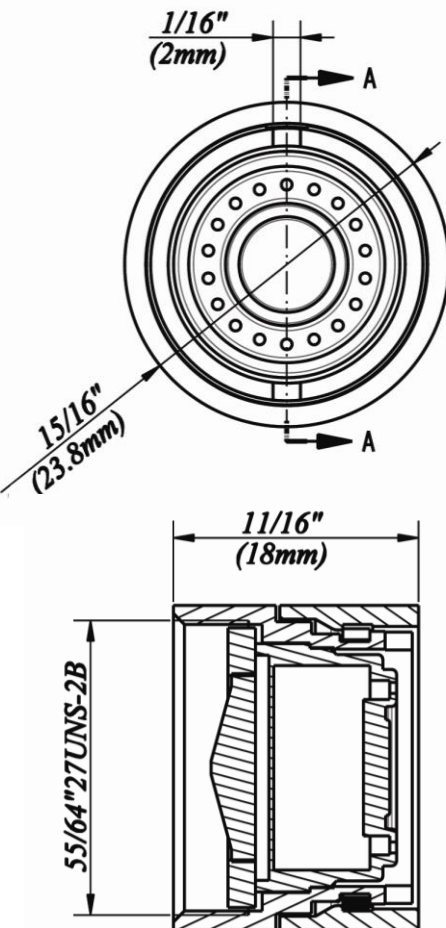

#### AVAILABLE FINISHES / FINIS OFFERTS / DISTINTOS ACABADOS:

- Polished Chrome / Chrome poli / Cromo lustrado (CP)



Contact your sales representative for more information or visit our website at [mainlinecollection.com](http://mainlinecollection.com)