

# Oasis Ramped Threshold, Transfer Shower Compartment With ActivLife Horizontal Bar Only Package (Not For Common Or Public Accommodation)



**Specification** – Oasis one-piece FRP gelcoat shower compartment SHFW-3837, having a 36 x 36-inches clear interior dimension and ½-inch high maximum finished threshold with floor attachment flange on lower threshold. An ActivLife factory-equipped package shall include a horizontal interior corner bar across control wall and on back wall, and reinforcement for seat opposite control wall.

**Standards Certification:**

The shower compartment listed is manufactured in compliance with ANSI Z124 Standards, and certified through an ongoing, independent quality assurance and testing program.




**SHFW-3837 / ICBAR-L**  
 (RH seat reinforcement / 2-wall bar package)  
 Model & Package Illustrated

**NOTE:** ADA regulations limit the use of seat deleted packages to certain non-public use applications (see ADA & ANSI standards for restrictions).



**Home Innovation**  
 LAB CERTIFIED™

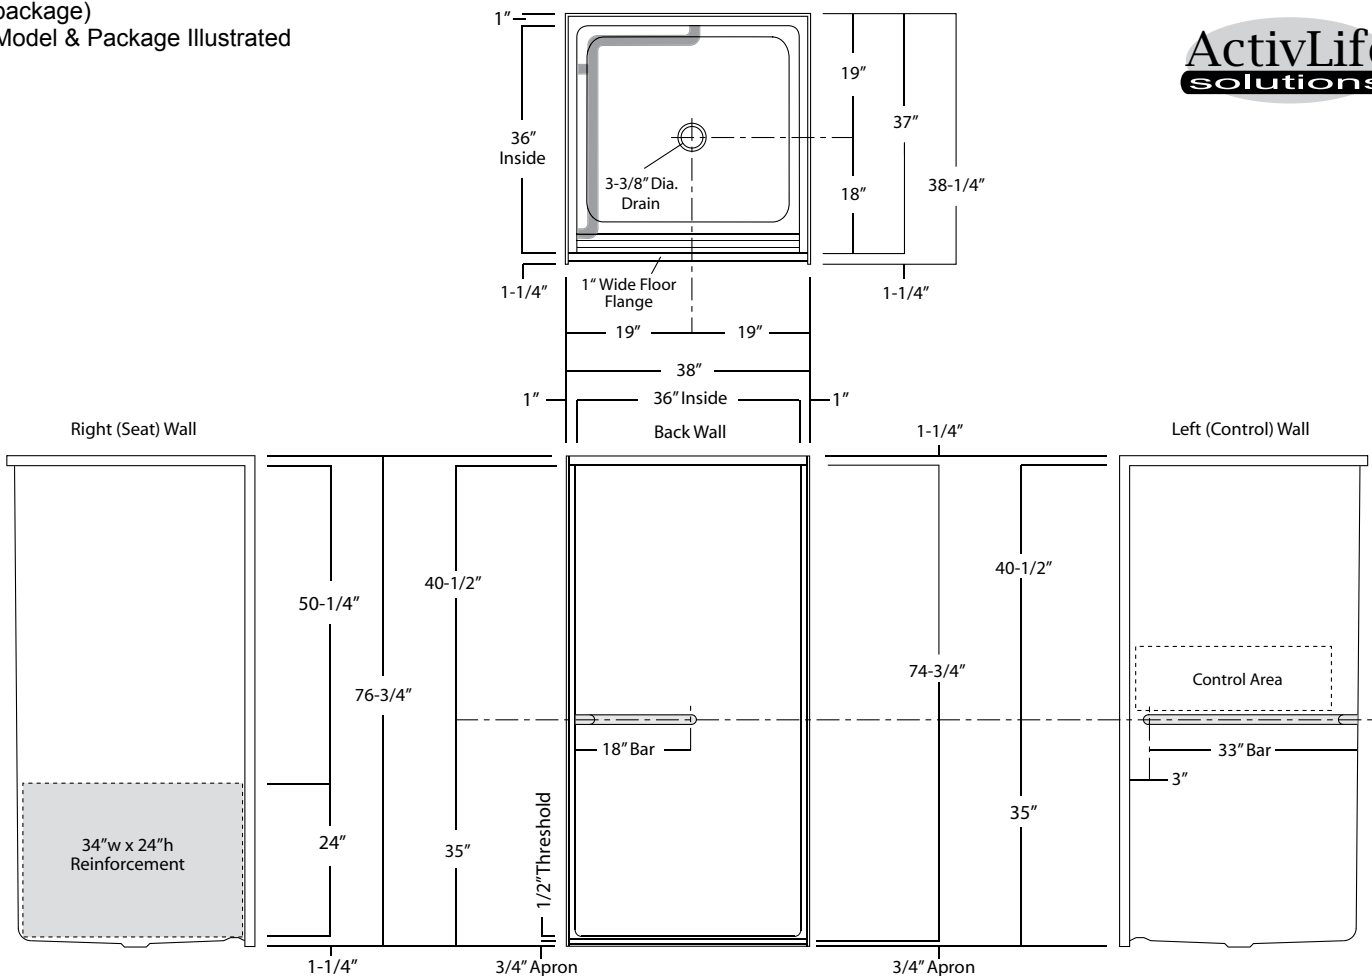

Dimensions shown are maximum. Due to the nature of the materials involved, actual unit dimensions can vary (tolerances: +0 / -3/8 inch). Oasis reserves the right to modify or discontinue product and/or associated equipment without prior written or verbal notification or obligation.

Model ID	Package Code	Description (define configuration referencing control side)
SHFW-3837	/ ICBAR-R	36" x 36" interior, center drain, ramped 1/2-inch threshold shower with ActivLife 1.50" dia. stainless steel single horizontal inside corner bar with seat reinforcement opposite control wall.
SHFW-3837	/ ICBAR-L	
<b>Powder Coated Bar Packages (1.25-inch dia.)</b>		
SHFW-3837	/ ICBAR-R WHT (right wall)	36" x 36" interior, center drain, ramped 1/2-inch threshold shower with ActivLife 1.25" dia. white powder coated bar (single horizontal corner bar across the control wall and back wall) and seat reinforcement opposite control wall.
SHFW-3837	/ ICBAR-L WHT (left wall)	
SHFW-3837	/ ICBAR-R OFW (right wall)	36" x 36" interior, center drain, ramped 1/2-inch threshold shower with ActivLife 1.25" dia. off-white powder coated bar (single horizontal corner bar across the control wall and back wall) and seat reinforcement opposite control wall.
SHFW-3837	/ ICBAR-L OFW (left wall)	
SHFW-3837	/ ICBAR-R SNK (right wall)	36" x 36" interior, center drain, ramped 1/2-inch threshold shower with ActivLife 1.25" dia. nickel finish bar (single horizontal corner bar across the control wall and back wall) and seat reinforcement opposite control wall.
SHFW-3837	/ ICBAR-L SNK (left wall)	
	ADD / SHWR ROD-SH	Factory installed 1" dia. stainless steel shower curtain rod.

**Package Notes:**

1. Model available without listed package.
2. For a single, inside corner bar with seat package, see "ADA10" package code.
3. For bar package only with vertical bar at entry, see ActivLife "2BAR" package code.
4. For ANSI compliant package with seat and vertical bar at entry, see "ANS09" package code.
5. For REINFORCEMENT ONLY replicating "ADA" package with seat reinforcement, see ActivLife "FH-RS/LS" package code.
6. For REINFORCEMENT ONLY replicating "ANS" package with seat reinforcement, see ActivLife "FHV-RS/LS" and "FHV-DS" package codes.
7. For expanded reinforcement package options (with or without package components), see ActivLife "3SM" and "3SF" package codes.

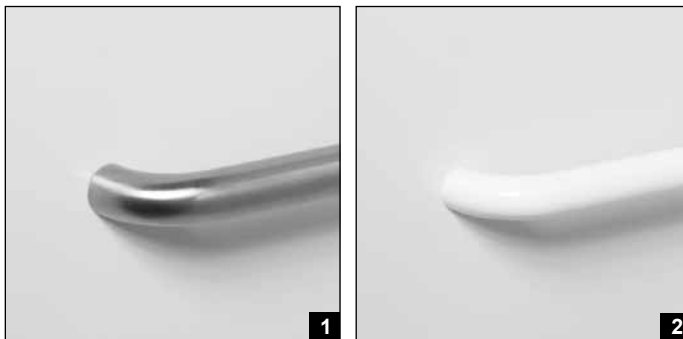
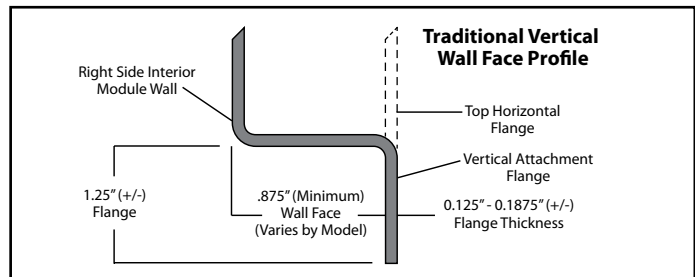
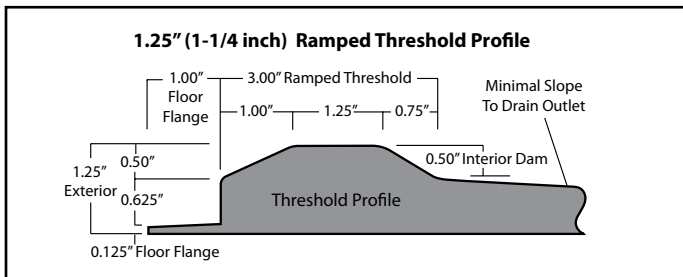


Photo 1: Grab Bars: Factory-installed 1.50-inch diameter, concealed attachment, 18 gauge, #304 brushed stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)

Photo 2: Grab Bars: Factory-installed 1.25-inch dia. powder coated (in finishes listed above), concealed attachment, 18 gauge, #304 stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)