## Oasis 60 x 32 Bathtub With ActivLife 4-Bar (4-horizontal) Package (not for public accommodation)



Specification – Oasis one-piece, 60 x 32-inch deep, FRP gelcoat bathtub model TS-6032, offered in a standard 16-inch or 17.25-inch (ABF) apron height. ActivLife package includes 2-horizontal bars on back wall along with a single horizontal bar on head end wall and on the control wall.

## Standards Certification:

The bathtub listed is manufactured in compliance with ANSI Z124 Standards, and certified through an ongoing, independent quality assurance and testing program.

The factory-applied grab bar package is certified through an independent review program.



TS-6032 R / 4BAR (RH drain / 4-bar package) Model & Package Illustrated

	Std Unit	ABF Unit
Α	73-3/4"	75"
В	72-1/2"	73-3/4"
С	16"	17-1/4"
D	1-3/4"	3"
E	13-3/4"	15"
F	-	-

High Shelf

Middle


Accessory


Ledge

Low Shelf

NOTE: Positioning of factory attached grab bars allow for installation of a shower enclosure.

NOTE: ADA & ANSI regulations limit the use of seat deleted packages to certain non-public use applications (see ADA & ANSI standards for restrictions).



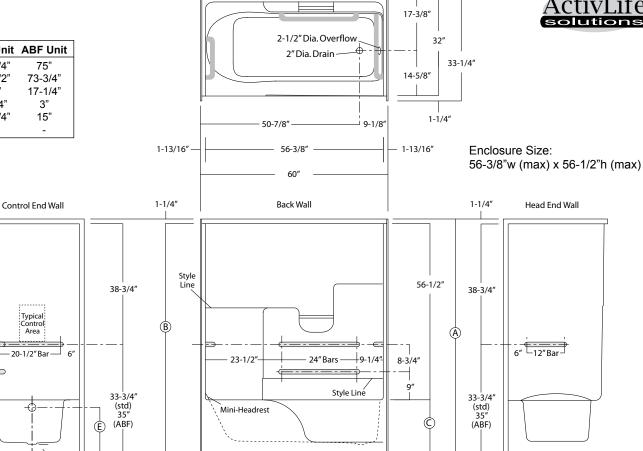

Dimensions shown are maximum. Due to the nature of the materials involved, actual unit dimensions can vary (tolerances: +0 / -3/8 inch). Oasis reserves the right to modify or discontinue product and/or associated equipment without prior written or verbal notification or obligation

D Drain Clearance

Model ID	Package Code	Description (define configuration referencing drain end)	
TS-6032 L (Std or ABF) TS-6032 R (Std or ABF)	/ 4BAR (left drain) / 4BAR (right drain)	60" x 32", end drain, tub-shower, with 16" (Std) or 17.25" (ABF) apron, and ActivLife 1.50" dia. stainless steel 4-bar package (single horizontal bars on head end wall and control wall, and two horizontal bars on the back wall).	
Powder Coated Bar Packages (1.25-inch dia.)			
TS-6032 L (Std or ABF) TS-6032 R (Std or ABF)	/ 4BAR WHT (left drain) / 4BAR WHT (right drain)	60" x 32", end drain, tub-shower, with 16" (Std) or 17.25" (ABF) apron, and ActivLife 1.25" dia. white powder coated 4-bar package (single horizontal bars on head end wall and control wall, and two horizontal bars on the back wall)	
TS-6032 L (Std or ABF) TS-6032 R (Std or ABF)	/ 4BAR OFW (left drain) / 4BAR OFW (right drain)	60" x 32", end drain, tub-shower, with 16" (Std) or 17.25" (ABF) apron, and ActivLife 1.25" dia. off-white powder coated 4-bar package (single horizontal bars on head end wall and control wall, and two horizontal bars on the back wall).	
TS-6032 L (Std or ABF) TS-6032 R (Std or ABF)	/ 4BAR SNK (left drain) / 4BAR SNK (right drain)	60" x 32", end drain, tub-shower, with 16" (Std) or 17.25" (ABF) apron, and ActivLife 1.25" dia. nickel 4-bar package (single horizontal bars on head end wall and control wall, and two horizontal bars on the back wall).	
	ADD / SHWR ROD-TS	Factory installed 1" dia. stainless steel shower curtain rod.	

## Package Notes:

- 1. Model available without listed package.
- 2. Model available with a vertical bar at entry, see ActivLife "5BAR" package code.
- 3. Model available with ANSI or ADA compliant bar and seat packages, see "ANS09" and "ADA10" package codes.
- 4. For 2 and 3-bar packages without seat, see ActivLife "BP1-60" and "BP2-60" package codes.
- 5. For REINFORCEMENT ONLY for bars (based on ANS09 package less seat), see ActivLife "FH" package code.
- 6. For expanded reinforcement package options, (with or without listed package components), see ActivLife "3SM" and "3SF" package codes.

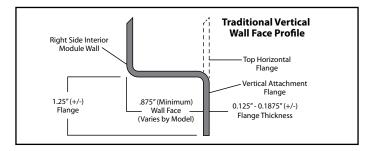






Photo 1: Grab Bars: Factory-installed 1.50-inch diameter, concealed attachment, 18 gauge, #304 brushed stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)

Photo 2: Grab Bars: Factory-installed 1.25-inch dia. powder coated (in finishes listed above), concealed attachment, 18 gauge, #304 stainless steel grab bars. Concealed attachment design provides tamper-resistance and minimizes debris collection areas at contact points, compared to common exposed flange bar designs, without compromising bar attachment integrity. (Reinforced areas include a structural core material encapsulated in FRP composite.)