
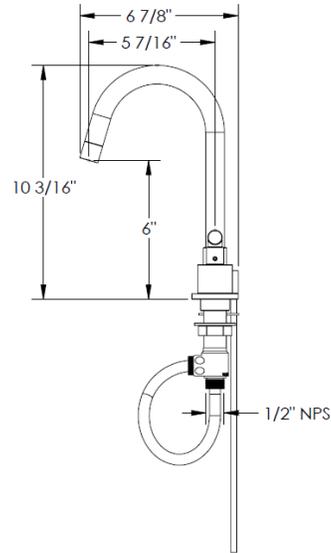


FEATURES


- ¼ turn washerless ceramic disc valve cartridges
- Flexible hose connection for 8" to 16" spread installations
- Flow rate 1.5 gpm (5.7 lpm) maximum flow rate
- Solid brass construction
- Listed by IAPMO, CSA, NSF, and other municipalities
- Warranty:
 - Limited lifetime warranty (residential use)
 - One year (commercial use)
- Shipping weight (lbs.) 10
- Shipping dimensions (in.): 29x12x4

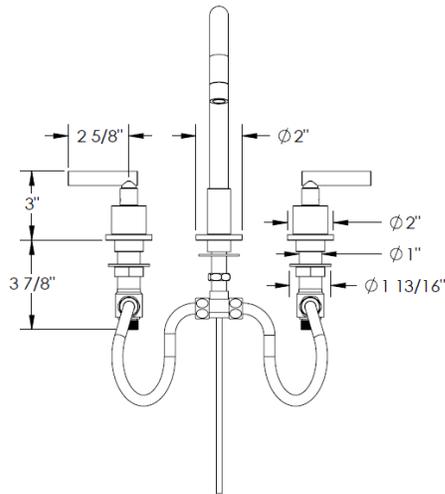


ITEM NO.	PART NUMBER	QTY.
3	27-2-SPT	1
4	27-2-AERTR-SHLL	1
5	27-2-LIFT-KNOB	1
8	NEOPERL PCA PL TT	1
10	142-LOCK-NUT	1
12	142-TEE-GSKT	1
13	142-TEE	1
14	142-HRS-SHOE-WSHR	1
16	502 FLEX HOSE	2
17	142-LOCK-NUT	2
18H/18C	SS-502 Valve Body	2
19H/19C	SS-502 Cartridge	2
32	L4-TOP-LOCK-NUT	2

HANDLE TRIMS


Touch-Lever (Code: CL14)

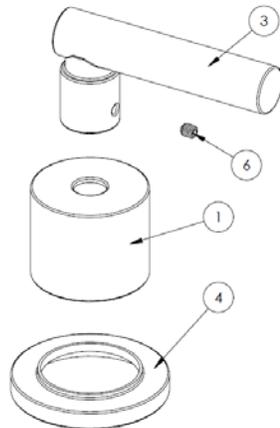


ITEM NO.	PART NUMBER	QTY.
1	CL14SM-ESC	1
3	CL14-LVR	1
4	CL14-ESC-RING	1
6	SSCUPSKT 0.164-32x0.1875-HX-S	1




Touch-Cross (Code: CL15)

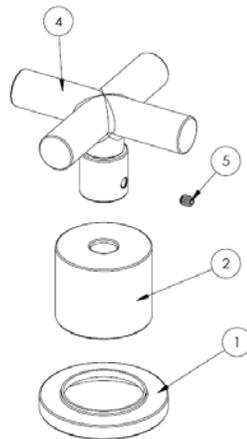


ITEM NO.	PART NUMBER	QTY.
1	CL14-ESC-RING	1
2	CL14SM-ESC	1
4	CL15-CRSS-HNDL	1
5	SSCUPSKT 0.164-32x0.1875-HX-S	1



Touch-Knob (Code: CL16)

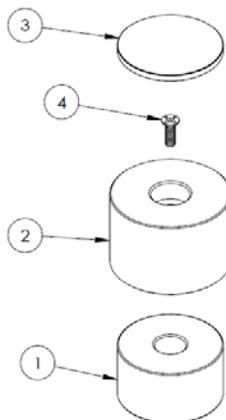

ITEM NO.	PART NUMBER	QTY.
1	CL16-ESC	1
2	CL16-KNOB	1
3	CL16-CAP	1
4	CR-FHMS 0.164-32x0.5x0.5-S	1



IMPORTANT INSTALLATION INFORMATION

- USE TEFLON TAPE OR PIPE SEALANT FOR THREADED CONNECTIONS
- DO NOT USE PLUMBER'S PUTTY ON ANY OF THE BRASS COMPONENTS
This will cause the finish to tarnish and void the warranty. A non-corrosive Alkoxy Silicone is recommended.
- DURING SWEATING OF LINES DO NOT OVERHEAT CASTING
Overheating may cause damage to internal mechanism
- COPPER ADAPTORS MAY BE REQUIRED TO COMPLETE YOUR INSTALLATION

For technical support, please call 718-257-2800

Rev. 1/1